



Ref.	DC12
	2018/11/21

FLC1200

Documentation Technique / Technical Documentation

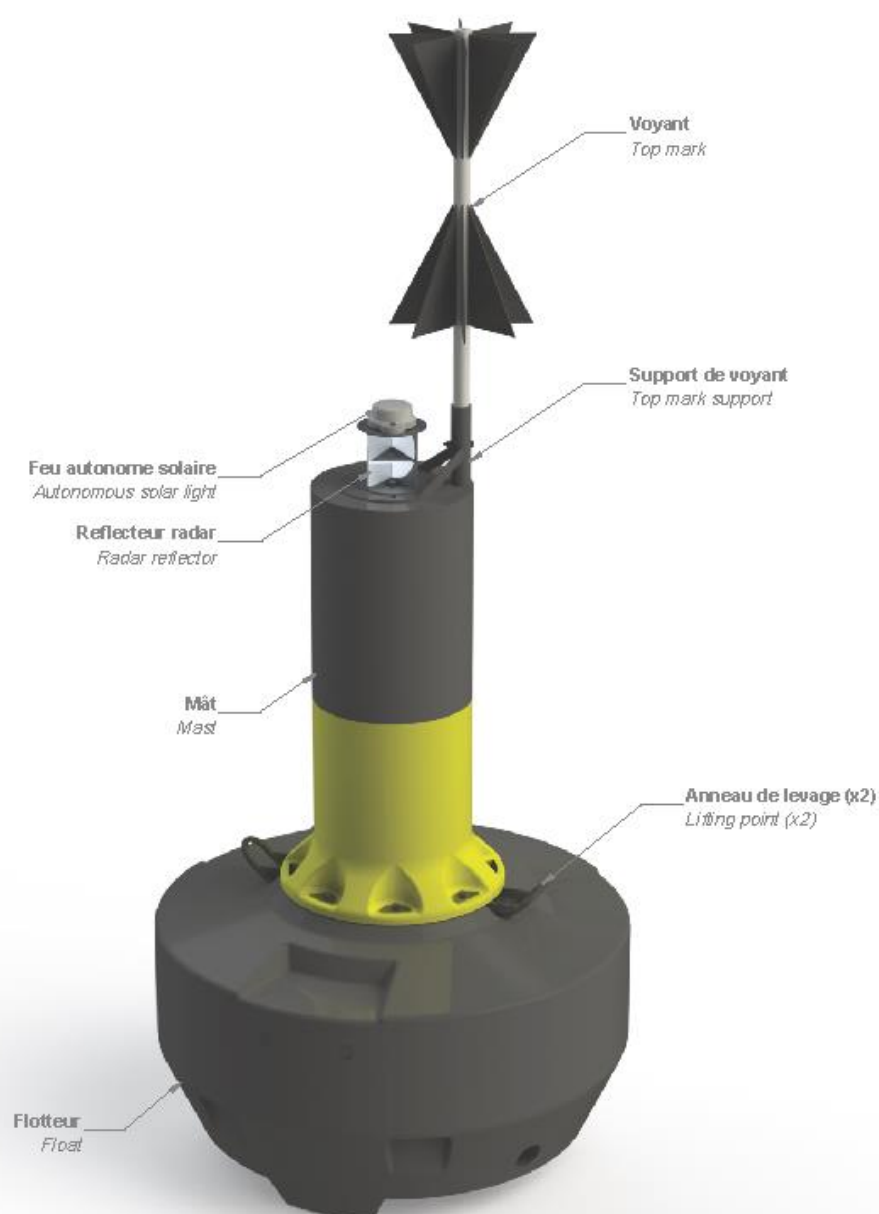

Ref.	DC12
	2018/11/21

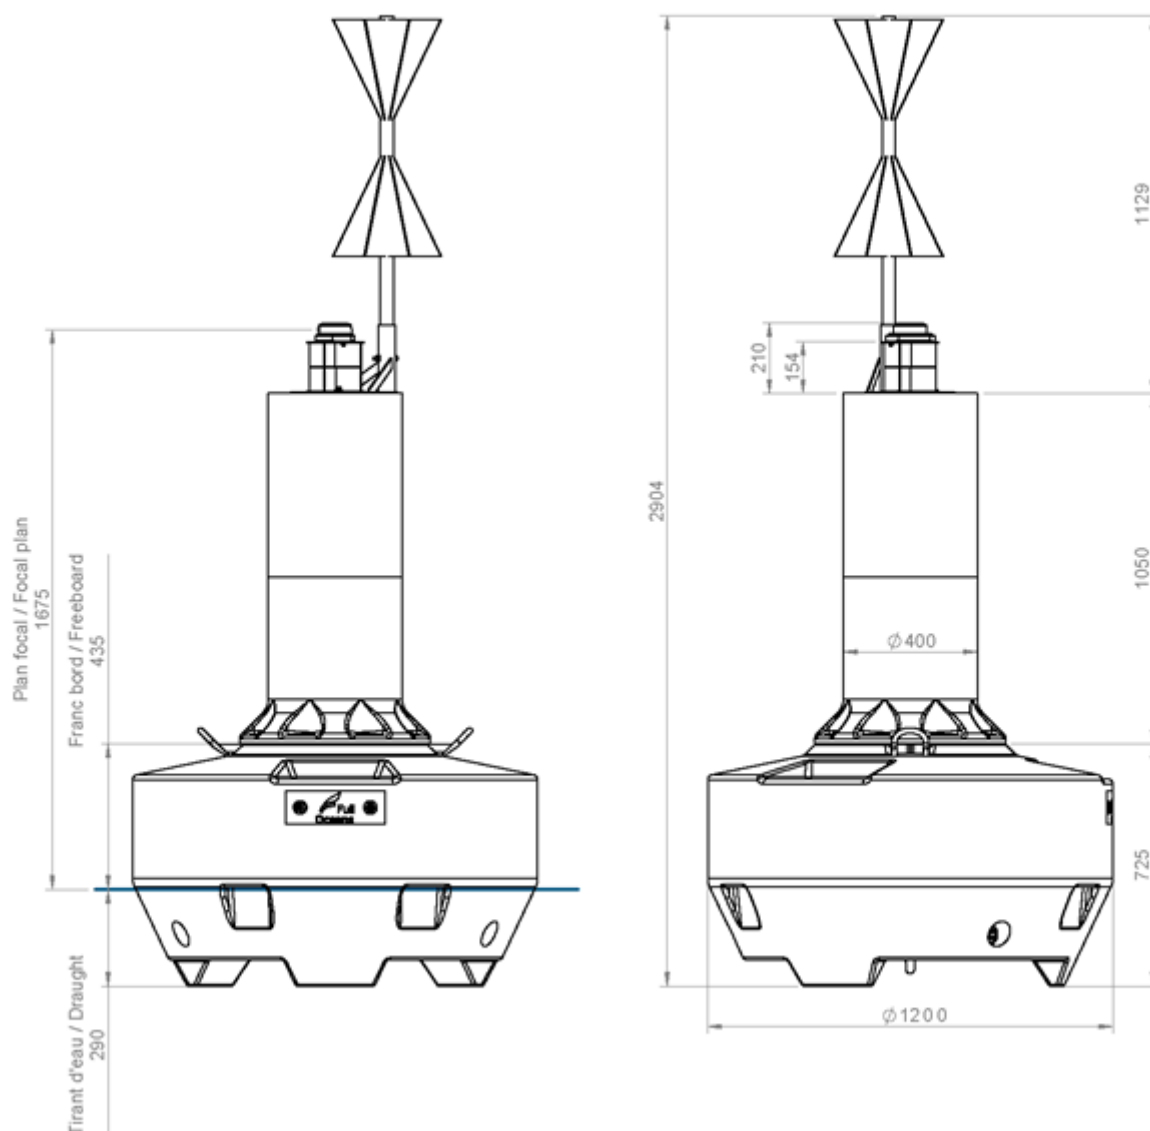

Spécification générales General Specifications		
Masse / Weight	kg	127
Surface Visible / Visible Area	m ²	1,1
Flottabilité / Submergence	kg /cm	11

Spécifications matière Material specifications	
Structure / Structure	Acier S235 galvanisé / S235 steel galvanized
Flotteurs / Floats	PE Icorene 3575 / Icorene 3575 PE
Mât / Mast	PE Icorene 3575 / Icorene 3575 PE
Voyant Passif / Top Mark	PVC rigide & nylon / Rigid PVC & Nylon
Réflecteur Radar / Radar Reflector	Aluminium 5083/5086 marine grade / Aluminium marine grade 5083/5086
Lest / Ballast	Fonte grise / Cast iron

Ø1200 SPECIFICATIONS					
Général / General		Matières / Materials		Quantité / Quantity	Masse / Weight (kg)
Diametre / Diameter (mm)	1200	Lest / Ballast	Fonte grise / Cast iron	3	181,3x143,4x113,3
Masse / Weight (kg)	126,93	Structure	Acier S235J2G3 galvanisée / galvanized steel S235J2G3	1	819,9x620,7x110
Volume (l)	570	Flotteur / Float	Polyéthylène haute densité / High density polyethylene	1	Ø1210x725 ep 8
Plan focal / Focal plane (mm)		Mousse / Foam	Polyuréthane 40 kg/m³ / Polyurethane 40 kg/m³	1	-
Avec RER / With RAR + M550	1675	Mât / Mast	Polyéthylène haute densité / High density polyethylene	1	Ø570x1050xØ400 ep4
Avec RER / With RAR + M650H	1780	Voyant / Topmark	PVC rigide & nylon / Rigid PVC & nylon	option	250x810xØ40
*SER : Surface équivalente radar / Equivalent radar surface		Support de voyant / Topmark support	Aluminium 5083/5086 qualité marine / Aluminium marine grade 5083/5086	option	320x250x204
		Reflecteur radar / Radar reflector	Aluminium 5083/5086 qualité marine / Aluminium marine grade 5083/5086	option	Ø170x150 (*SER : 10m²)
		Feu / Lantern	CARMANAH M550	option	154x117x56
			CARMANAH M650H	option	176x170
		Visserie / Screws	-	1	-


Ø1200 MARQUES SPECIALES / SPECIAL MARKS SPECIFICATIONS					
Général / General		Matières / Materials		Quantité / Quantity	Masse / Weight (kg)
Diametre / Diameter (mm)	1200	Lest / Ballast	Fonte grise / Cast iron	3	181,3x143,4x113,3
Masse / Weight (kg)	123,62	Structure	Acier S235J2G3 galvanisée / galvanized steel S235J2G3	1	819,9x620,7x110
Volume (l)	570	Flotteur / Float	Polyéthylène haute densité / High density polyethylene	1	Ø1210x725 ep 8
Plan focal / Focal plane (mm)		Mousse / Foam	Polyuréthane 40 kg/m³ / Polyurethane 40 kg/m³	1	-
Avec RER / With RAR + M550	1953	Mât / Mast	Polyéthylène haute densité / High density polyethylene	1	Ø570x1050xØ400 ep4
Avec RER / With RAR + M650H	2058	Voyant / Topmark	Aluminium 5083/5086 qualité marine / Aluminium marine grade 5083/5086	1	428x244x170
*SER : Surface équivalente radar / Equivalent radar surface		Feu / Lantern	CARMANAH M550	option	154x117x56
			CARMANAH M650H	option	176x170
		Visserie / Screws	-	1	-

QUELQUES EXEMPLES AVEC OPTIONS / FEW EXEMPLES WITH OPTIONS


CARDINALE EST/ CARDINAL EAST



CARDINALE NORD/ CARDINAL NORTH

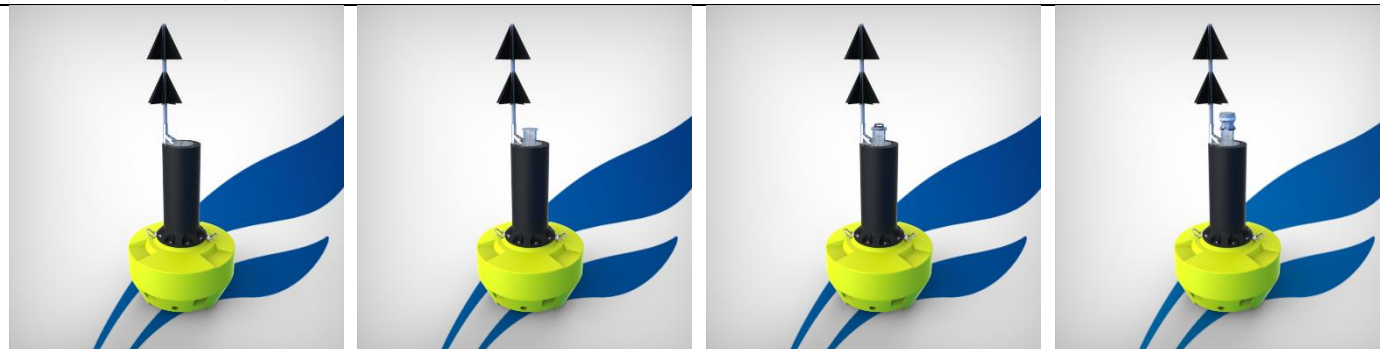

LATÉRALE CONIQUE / LATERAL CONIC

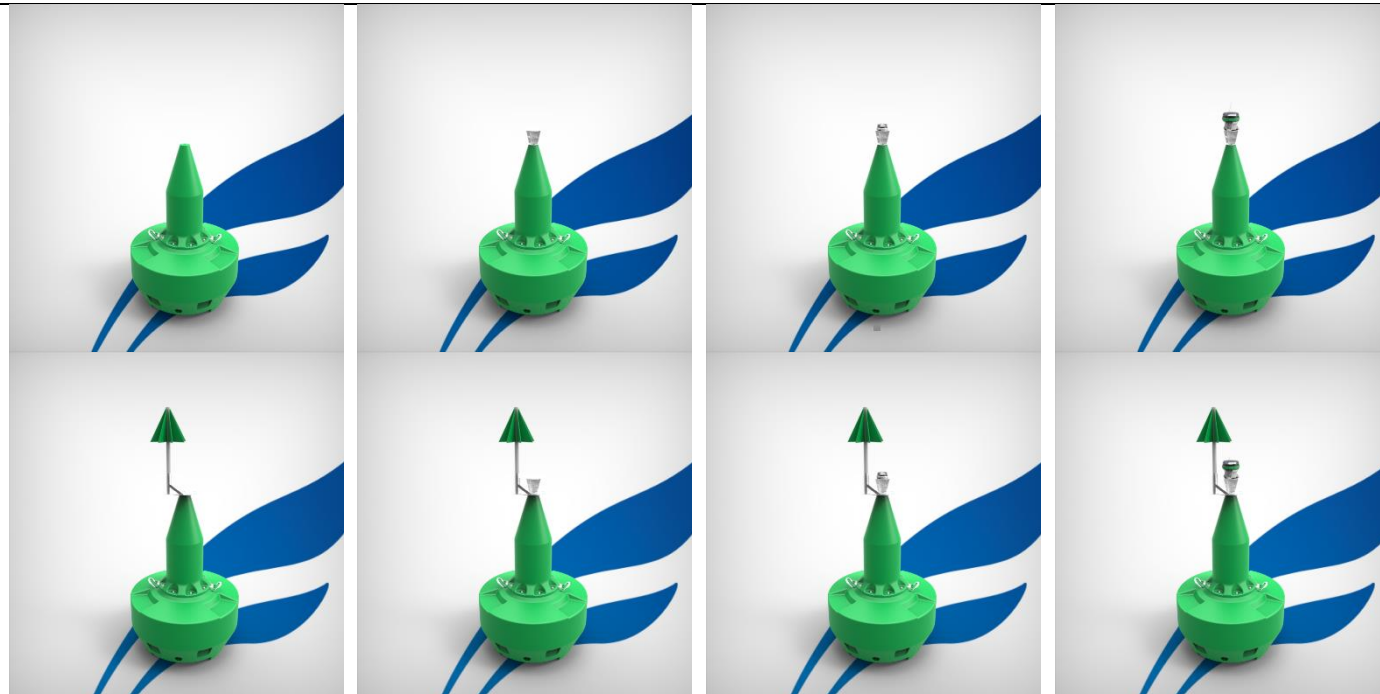


Toutes les configurations possibles sur le site
All available configurations on website

www.fulloceans.com

Ref.	DC12
	2018/11/21

CHENAL PRÉFÉRÉ / PREFERRED CHANNEL

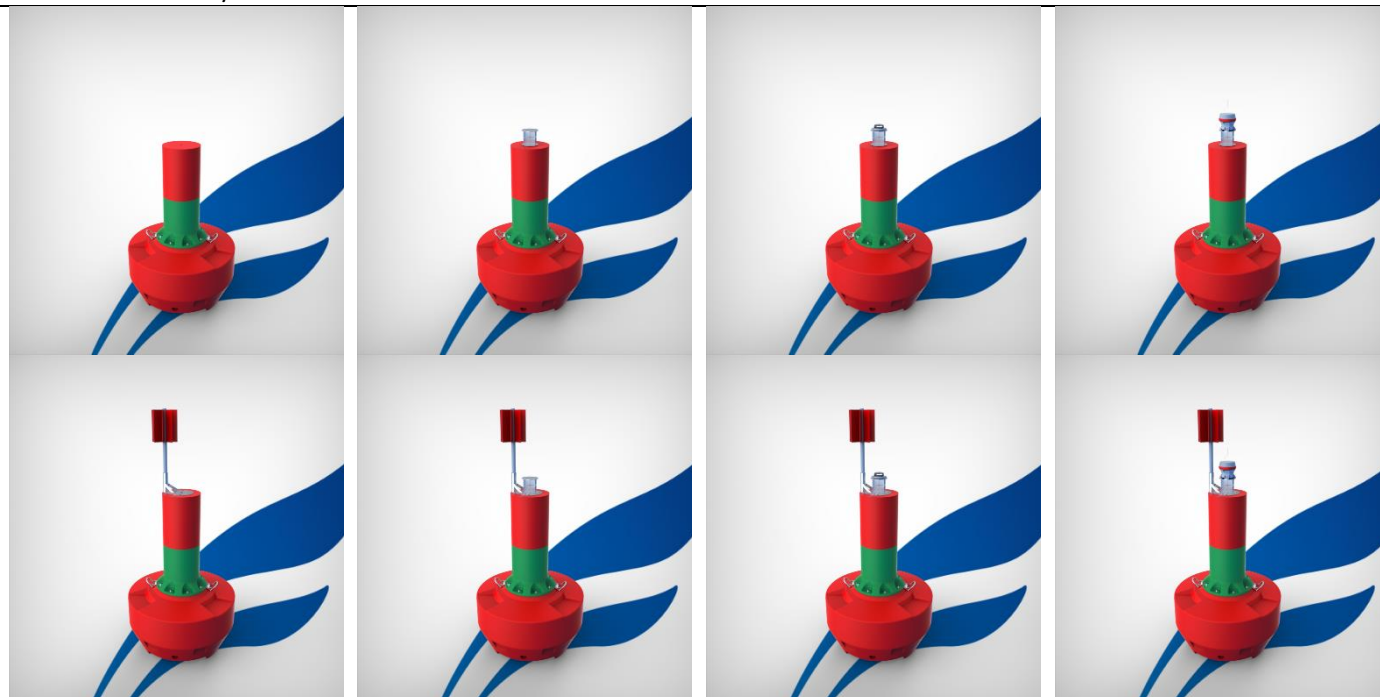

DANGER ISOLÉ / ISOLATED DANGER



MARQUE SPECIALE CYLINDRIQUE / SPECIAL MARK CYLINDRIC




Toutes les configurations possibles sur le site
All available configurations on website

www.fulloceans.com

Ref.	DC12
2018/11/21	



Ref.	DC12
2018/11/21	

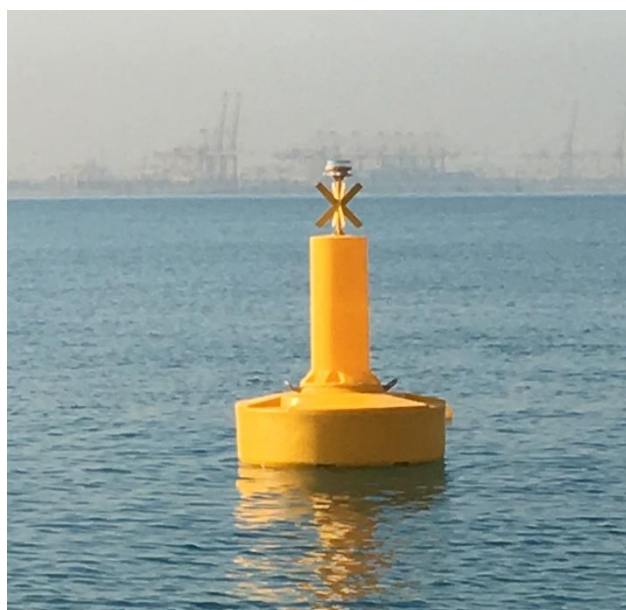

Toutes les configurations possibles sur le site
All available configurations on website

www.fulloceans.com

www.fulloceans.com

info@fulloceans.com | Telephone: +33 (0)413 682 288
Head office: 171 bis, chemin de la Madrague Ville F-13002 Marseille - France


Ref.	DC12
	2018/11/21

CALCULATE YOUR MOORING SOLUTIONS WITH CALMAR

FullOceans recommends CALMAR the best software for the calculation of your mooring lines. CALMAR is fully adapted to FullOceans buoys, and permits to define the best mooring options according to sea conditions.

CALMAR is easy to use and available in 6 languages.

IALA had endorsed CALMAR as the leading mooring line calculation software.

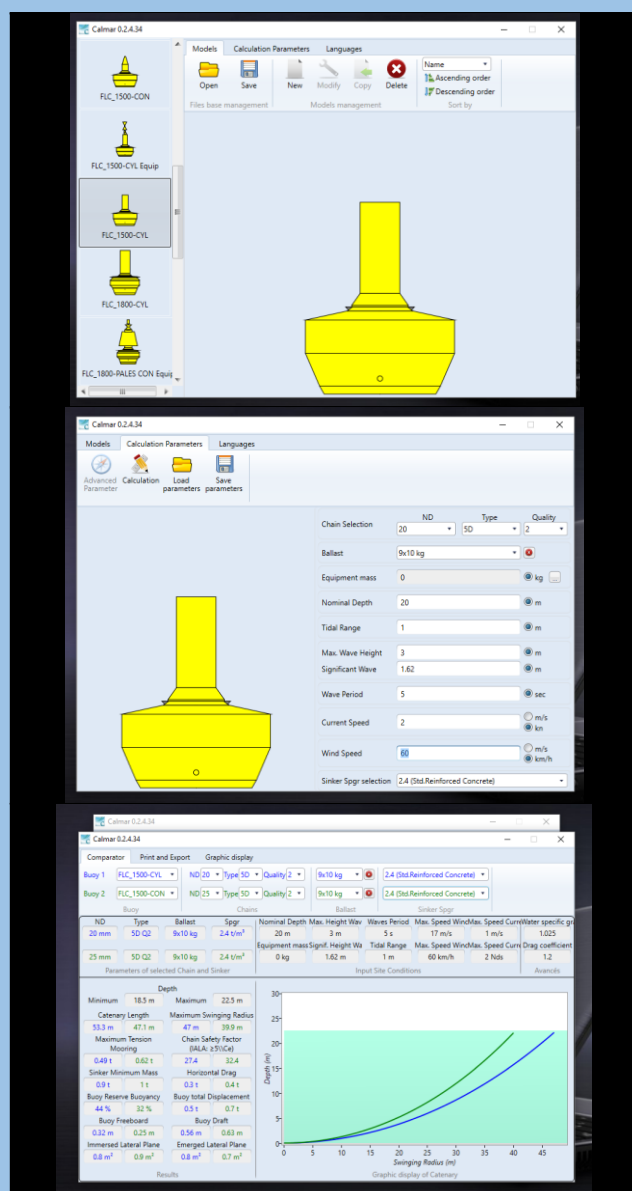

Choose your FullOceans model

- FLC1200
- FLC1500
- FLC1800
- FLC2200

Enter the sea conditions

- Depth
- Tidal range
- Max wave height
- Max wind
- Wave period
- Current speed
- Wind speed

Get mooring length and much more

- Mooring line length
- Tension
- Sinker mass
- Buoyancy reserve
- Freeboard
- Swinging radius
- Compare chain models
- And much more

Free Download of CALMAR on www.fulloceans.com